

VT-ACSO1/KT

Audio Surveillance Kit
with Discreet Microphone



FEATURES

- Audio Control Station with internal 3" Speaker for monitoring live audio and playback
- Omni-directional Brushed Aluminum Button Style Condenser Microphone designed to pick up sounds within a 50' diameter
- High Sensitivity of -30dB
- Microphone can be installed up to 2000' from base station using 22awg shielded microphone wire (not included)
- 12VDC power supply, 3' Dual RCA Audio Cable, and Audio Warning Decal are also included



Easy To Operate Front Panel Controls



Rear Input Connections



(888) VITEK-70 | WWW.VITEKCCTV.COM
28492 Constellation Road Valencia, CA 91355

VT-ACSO1/KT

Audio Surveillance Kit
with Discreet Microphone

Detailed Specifications	VT-ACSO1
Output Power	5W @ 8 Ohms
Output Impedance	600 Ohm Unbalanced
Input Impedance	10K Ohm Unbalanced
Frequency Response	20Hz - 20kHz
Power Supply	12VDC-1AMP
Dimensions	1 - 3/4"H x 5 - 7/16" W x 6 - 3/8" L

Detailed Specifications	VT-BT/MIC
Output	Line Level (0dB @1K Ohm) Unbalanced
Sensitivity	-30dB
Power Consumption	5ma
Supply Voltage	12VDC
Dimensions	1 3/8" Diameter x 1 7/8" L

VT-ACSO1-KT Kit Includes:


VT-ACS01 - Audio Control Station with internal 3" Speaker for monitoring live audio and playback

VT-BT/MIC - Omni-directional Brushed Aluminum Button Style Condenser Microphone designed to pick up sounds within a 50' diameter


VT-12VDC-1000S - 12Volt Power Adapter

VT-RCA-3 - 3' Dual RCA to RCA Audio Cable

VT-A-Decal - Audio Warning Decal

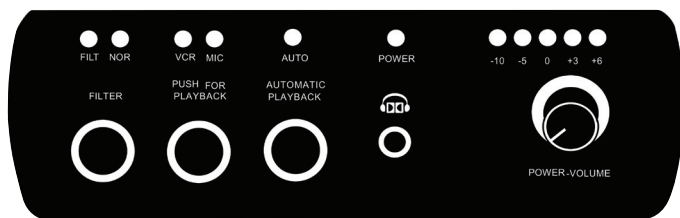

Front Panel Controls

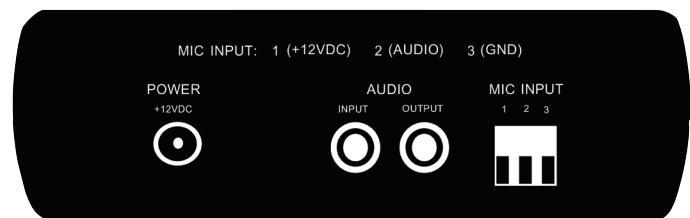

Rear Input Connections



(888) VITEK-70 | WWW.VITEKCCTV.COM
28492 Constellation Road Valencia, CA 91355