

Thank you for choosing this high quality camera, before attempting to connect or operate this product, please read these instructions completely the instruction carefully.

B/W CCTV CAMERA OPERATING MANUAL

SPECIFICATION	
Pick up Element	B/W Samsung CCD image sensor
Number of Pixel	510(H)x492(V) <EIA> / 500(H)x582(V) <CCIR>
Resolution	380 TV lines
Min. Illumination	0.5Lux/F2.0
S/N Ration	More than 46dB (AGC off)
Electronic Shutter	1/60(1/50) to 1/100000 auto
Load Impedance	75 Ω
Standard Board Lens	f3.6mm/F2.0
Lens Angle	92°
Power Source	DC12V± 10%
Current Consumption	75mA
Dimensions	87mm (L) x 26mm (Ø)
Weight	295g

WARNING:
TO PREVENT FIRE OR ELECTRIC SHOCK HAZARD,
THIS APPLIANCE IS NOT DESIGNED FOR WATER DIVING RESISTANT.


General

This is a B/W CCD video camera employs a Samsung CCD (charge coupled device) solid-state imaging device which provide extremely long life and high reliability. The special of this camera is it is designed to be water resistant for no problem to be located outdoor. This high quality camera is also designed to have very low current consumption of 75mA only to achieve excellent reliability.

Features

1. 380 TV lines of horizontal resolution and high quality picture.
2. Built in Auto Electronic Shutter.
3. Minimum illumination of 0.5Lux/F2.0 .
4. Signal-to-noise ratio of 46dB.

Major operating controls and functions

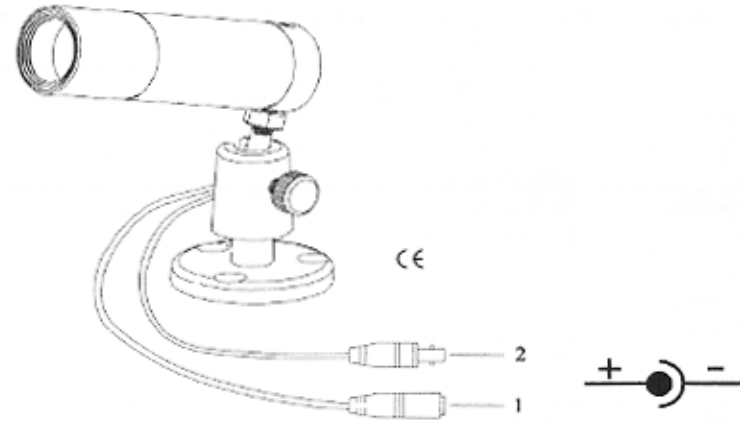

1. DC12V Input Terminal : For connected to power supply.
2. Video Output Connector (VIDEO OUT) : For connected to video terminal.

CONNECTIONS

1. Connect to the power cord:
This is to connect camera to a 12V DC regulated power supply.
2. Connect to video input:
This is to connect camera to 75Ω video terminal with standard 75 Ω coaxial cable

STANDARD ACCESSORIES

1. Main Body * 1
2. Bracket * 1
3. Instruction Manual * 1