


Vandal Proof IR Mighty Dome Cameras

700 TV Line Dome Camera Series
with IR LED Illumination



FEATURES

- 35 IR LED's with 120' Range
- 1/3" Sony High Density EXVIEW CCD
- 700 TVL High Resolution
- Sony Effio-E Digital Signal Processor
- 0.0003Lux (F1.2@50IRE)
- 2DNR - Two Dimensional Noise Reduction
- Motion Detection
- Privacy Mask
- Adaptive Tone Reproduction
- Secondary Video Output (Cable Included)
- OSD (On Screen Display) for Camera Function Setup
- Flush or Surface mount
- Infinity Ball Mount for Any Viewing Angle
- UTP Interface
- 3/4" Conduit Knockouts
- Available in Ivory or Black color
- With Night Watch DSS Low Light Color Technology
- 24VAC/12VDC Dual Voltage

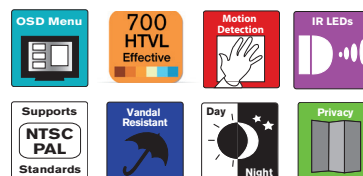

Available Configurations Include:

VTD-MVP2810/L35

Outdoor Vandal Proof Mighty Dome 700TVL Camera w/2.8-10mm Lens, 35 IR LED's, OSD, Day Night w/ICR and "Night Watch" DSS -12VDC/24VAC

VTD-MVP922/L35

Outdoor Vandal Proof Mighty Dome 700TVL Camera w/9-22mm Lens, 35 IR LED's, OSD, Day Night w/ICR and "Night Watch" DSS -12VDC/24VAC

VTD-MVP1850/L35

Outdoor Vandal Proof Mighty Dome 700TVL Camera w/18-50mm Lens, 35 IR LED's, OSD, Day Night w/ICR and "Night Watch" DSS -12VDC/24VAC



(888) VITEK-70 | WWW.VITEKCCTV.COM
28492 Constellation Road Valencia, CA 91355

Vandal Proof IR Mighty Dome Cameras

700 TV Line Dome Camera Series
with IR LED Illumination

| Detailed Specifications | NTSC | PAL |
|-------------------------|--|-----------------------|
| Image Device | 1/3" Sony High Density EXVIEW CCD | |
| Image Processor | Sony Effio-E Digital Signal Processor | |
| Effective Pixels | 976(H) x 494(V) | 976(H) x 582(V) |
| Scan System | 2:1 Interlace | |
| Scan Frequency | 59.94Hz(V), 15.734KHz(H) | 50Hz(V), 15.625KHz(H) |
| Synchronization | Internal | |
| H. Resolution | 700TVL | |
| Sensitivity | 0.0003Lux (F1.2@50IRE)* | |
| S/N Ratio | More than 52dB with AGC OFF at 50IRE | |
| Electronic Iris | 1/60 ~ 1/100,000sec | 1/50 ~ 1/100,000sec |
| White Balance | 1,800 ~ 10,500K Automatic Tracking | |
| IR LED's | 35 IR LED's with up to 120' Range | |
| Motion Detection | YES (24X16 BLOCK ALARM AREA) | |
| Privacy Mask | 8 Mask | |
| OSD Language | EN, FR, DE, ES, POR, SC, RUS, JP | |
| Day & Night | Infrared Cut-Filter Removable Built-In | |
| IP Rating | IP686 | |
| Lens Options | F1.2 2.8~10mm DC Auto Iris IR Corrected ICR / F1.8 9~22mm DC Auto Iris IR Corrected ICR / F1.5 18~50mm DC Auto Iris IR Corrected ICR | |
| Video Output | VBS 1 Vpp +/- 10%, 75ohm | |
| Operating Power | 24VAC / 12VDC | |
| Operating Condition | -4F ~ 122F / -20C ~ 50C, 85% RH. Max. Non-condensing | |
| Dimensions (H x Dia.) | 4.45" x 6.73" (110mm x 170mm) | |
| Weight (Camera) | 2.3 lb / 1043g | |
| Weight (Carton) | 2.9lb / 1315g | |



VT-MDPLMT
Mighty Dome Pole
Mount



VT-MDCNMT
Mighty Dome Corner
Mount







VT-MD/CMT
Mighty Dome Ceiling
Mount



VT-MD/WMT
Mighty Dome Wall
Mount



VTD-MD-FMP
Mighty Dome Flush
Mount Decorator
Plate



(888) VITEK-70 | WWW.VITEKCCTV.COM
28492 Constellation Road Valencia, CA 91355