

VITEK

PERFORMANCE YOU NEED
QUALITY YOU TRUST

VTR-24/960

960 HOUR TIME-LAPSE RECORDER



Rear Of Recorder Remote Control



RECORDER FEATURES:

- ▶ VIRTUAL REAL-TIME HI-DENSITY RECORDING UP TO 24 HOUR MODE
- ▶ 15 RECORDING MODE SPEEDS
- ▶ CAMERA SWITCH OUTPUT FOR SYNCHRONIZING WITH MULTIPLEXERS
- ▶ HAND HELD IR REMOTE CONTROL INCLUDED
- ▶ AUTO REPEAT, TIMER, AND SERIES RECORDING
- ▶ DUAL-AZIMUTH 4-HEAD SCANNING SYSTEM

The VTR-24/960 Time-Lapse VCR Enables Recording Of Video Images For Up To 40 Days On One VHS Tape. Simple, Convenient, User Friendly Front Panel Controls And Wireless Remote Control Add To Its Attractive Styling And Extensive List Of Features.

VITEK

Industrial Video Products, Inc.

"Quality Products At An Affordable Price"

Specifications

VTR-24/960

GENERAL

Recording Method	Dual-Azimuth 4-Head Rotating Helical Scanning System
Audio Recording	In 2, 6, And 18 Hour Modes
Tape Speed	33.35 M/Sec (2 Hour Mode)
Specified Video Cassette Tape	VHS 1/2 Inch Video Cassette
Recording Playback Time	L2, L6, L18, 24, 36, 48, 72, 96, 120, 168, 240, 360, 480, 720, 960 Hours (When Using T-120 Tape)
Fast Forward/Rewind Time	Within 3 Minutes (When Using T-120 Tape)

VIDEO

Recording Method	Luminance Signal: FM Recording / Color Signal: Down-Converted Subcarrier Direct Recording
Video Input	1 Vp-p, BNC, 75 ohm, Unbalanced
Video Output	1 Vp-p, BNC, 75 ohm, Unbalanced
Horizontal resolution	B/W Mode: 350 Lines / Color Mode: 300 Lines

AUDIO

Input	RCA Pin Jack More Than 47K ohms ~ 8.8dBm, Unbalanced
Output	RCA Pin Jack More Than 1.5K ohms ~ 7.8dBm, Unbalanced
Microphone Input	-60 dBs, 3.5mm Mini Jack, 10K ohm Unbalanced



CONNECTORS

Alarm Input	DC 4-5C (Open), DC 0-0.8V (Closed) / 5.7 ohm
Alarm Output	DC 4-5C (H), DC 0-0.8V (L) / 5.7 ohm
Panic Input	DC 4-5C (Open), DC 0-0.8V (Closed) / 5.7 ohm
End Input	DC 4-5C (H), DC 0-0.8V (L) / 5.7 ohm
Warning Input	DC 4-5C (H), DC 0-0.8V (L) / 5.7 ohm
Series Input	DC 4-5C (H), DC 0-0.8V (L) / 5.7 ohm
Series Output	DC 4-5C (H), DC 0-0.8V (L) / 5.7 ohm
Switch Output	DC 4-5C (H), DC 0-0.8V (L) / 5.7 ohm
Common	0V (Ground)

OTHER

Operating Temperature Range	41°F ~ 104°F
Operating Humidity Range	80% Or Less
Power Requirements	AC90 ~ 240V, 50/60 Hz
Power Consumption	17W
Dimensions	360(W) x 90(H) x 289(D) / 14.17"(W) x 3.54"(H) x 11.38"(D)
Weight	Approximately 8.8 lbs. (4 kg)

REAR OF UNIT / CONNECTIONS

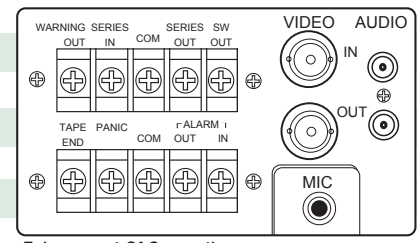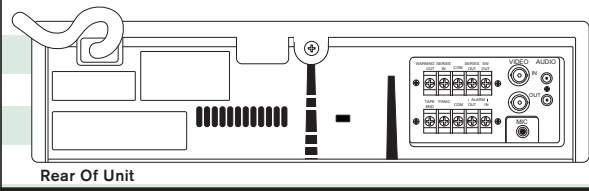

9970 GLENOAKS BLVD. UNIT B SUN VALLEY, CA 91352
 PHONE: 888-VITEK-70 818-771-0300 FAX: 818-771-0400
WWW.VITEKCCTV.COM