

VTM-101C

10" COLOR MONITOR WITH 420 TVL & AUDIO



FEATURES:


- ▶ 420 TV LINES AT CENTER ON A 10" DIAGONAL SCREEN
- ▶ ATTRACTIVE BLACK METAL CABINET
- ▶ EASY TO OPERATE FRONT PANEL CONTROLS
- ▶ LOOPING INPUT
- ▶ AUDIO IN / AUDIO OUT

The VTM-101C Offers high resolution and high contrast pictures with solid state circuitry for a long service life. The cabinet is built with a rugged, attractively styled steel. A regulated power supply maintains excellent performance during fluctuations in line voltage. Controls for Tint, Color, Brightness, Contrast, Volume, and Power On/Off are located at the front of the unit.

Specifications

VTM-101C

Picture Tube	10" CRT, 0.63mm Stripe Pitch, 90° Deflection
Resolution	420 TV Lines
Input Signal	Video Composite: 1Vp-p
Sub Carrier Frequency	NTSC: 3.579545MHz / PAL: 4.433618MHz
Sync. Range	+/- 500Hz
Horz. Frequency Stability	NTSC: 15.75KHz / PAL: 15.625KHz
Vert. Frequency Stability	NTSC: 60Hz +/- 5Hz / PAL: 50Hz +/- 5Hz
High Voltage	19KV +/- 1.0KV
Convergence	Less than 1mm (From middle of screen)
Audio	1W Max.
Humidity	Within 90% RH
Operation Temperature	32° ~ 104°F
Power Source	AC 90V ~ 260V (50/60Hz)
Power Consumption	45W Max
Dimensions	9.90" x 9.36" x 10.92" (W x H x D)

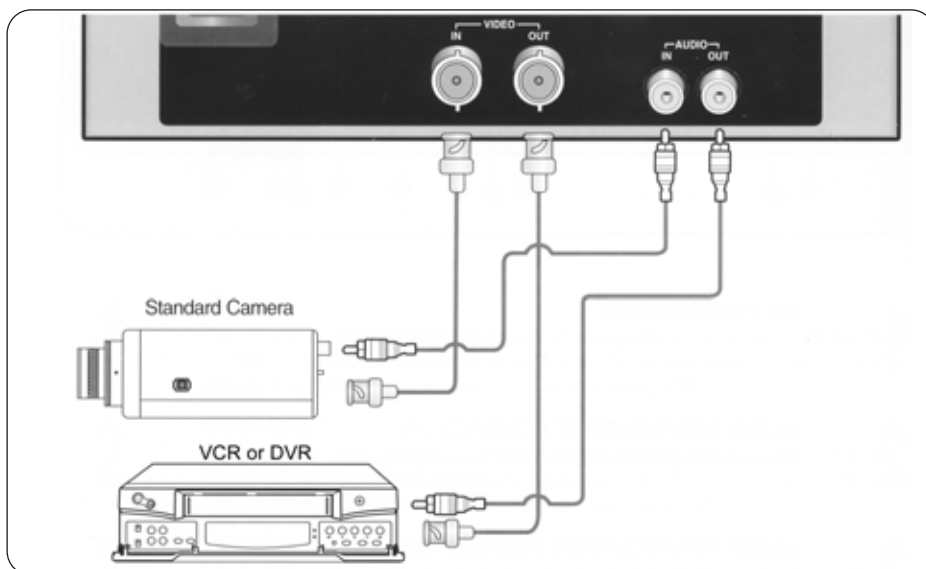

9970 GLENOAKS BLVD. UNIT B SUN VALLEY, CA 91352
 PHONE: 888-VITEK-70 818-771-0300 FAX: 818-771-0400
WWW.VITEKCCTV.COM